

back-perl updates


OpenLDAP Developers' Day
San Francisco 2003

What I did...

- Added more operations
 - extended, connection_destroy, connection_init
- New return-semantics
 - scalar (backwards compat)
 - [`$code $matched $rmsg`]
 - {code=>`$code`,text=>`$rmsg`,matched=>`$matched`}
- Pass along a connection-like object

Why I did it...

- Transparent policy-proxy for user mgmt

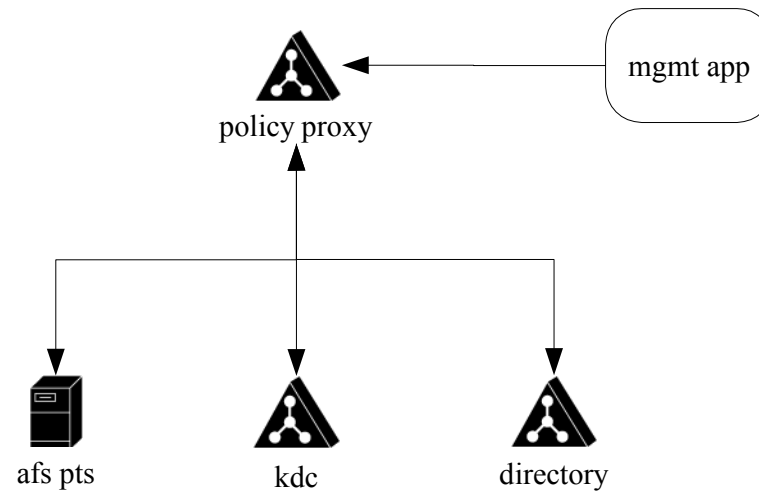

Hmmmm...

- More effective entry return mechanism.
 - ber-encoded or ...
 - using callbacks into the backend
- Net::LDAP integration (?)
- ??